# BIO CESS

## **BX400**

Portable SSR
Fingerprint Time
Attendance &
Access Control
System



BIOXCESS BX400 is a 2.8-inch TFT screen Time Attendance & Simple Access Control Terminal. It has interfaces for third party electric lock and exit button. TCP/IP and USB Host make data management extremely easy. Most importantly, the built-in backup battery can eliminate the trouble of power-failure. With elegant appearance and reliable quality you can get the best from it.

#### **Features**

- 2.8-inch TFT color screen
- Built-in Battery
- Simple Access Control or External Bell
- Multi-Languages
- SSR Reports in Excel Form


		ĺ	Surita			Att. D:	ite:	2011-08	-01 ~ 2011	.00.70			_		Ca	rd Re	epor	t							
			Special sh	N Dept	Dept. Company http://doi.org/10.1142/20																				
		1.She		Sched	dule date	Date	2011-08-					1.	Dept.		Compan	Y	Name	741	SI .	Deat	_				
First tie		Second fire	D	Name	Department	Absen	AFL O	-		ID		1	Date	2011-08-0	1-2011	-08-20	ID	- 4				Company 11 - 2011-		Name	808
On-duty 9i 00		Ondaty (	1	1	Company		(Day) (Day		Overtine(H)	Lat		Leave early	Absen	AFL Ou	On-	Overtine(H)	Late	14	ais eatr		AFL OU		R-A Horinolti	0	_
9, 00		14: 00 T. 13: 30 T	4	7411	Company	_			ready roady	(Tines)	(Min) (T	ines) (Min)	t(Day)	(Day) (Da	duty	HADE TOWN	(Tines) [		es) (Min)	1Dai	Davi Do	d cat	verane(r)	Lite	-
			5	888888	Company	15	0 0	0	0.00 0.00	0	0	0 0	15	0 0	8	0.00 0.00	0	0 0	0	15			00 00	é é	(H) (
			6	6	Company	1													-			10.00		C	,
7 7			Company	Att. Rep				ort			Att. Report						Att. Report								
8 8 Company								time zone Overtime			Week First time zone Second time zone Diedme					Week First firms zone Second fire zone (Ne									
		-	9 10	9 10	Company	Date	On-duty	Off-duty	On-duty	Off-dub	Check	In Check-Out	Date	On-duty	Offdate	On-daty	Of-duty	Check-In	Oresi-Ori		On-day	05dah	Onda	0f-8ah	Check
			11	11	Company	01 MON	-			18:00	18:00	-	91 MCN	02:20	11:30	13:01	18:00	18 02	22:31	81 V\$16	32:50	11:30	20	18:00	13:1
			12	12	Company		02:20	11:30	13:01		10.00	22.34	00 TUE	09:00	11:30	13:35	18:00	10.00	66.55	27.05		11:30	13:35	18:00	
		-	13	13	Company	02 TUE	09:00	11:30	13:35	18:00			00 WED	*****	11:30	13:01	(8:00	18.02	22:31	DXED	DE 20	11:30	13:01	18:00	13:1
			14	14	Company	03 WED	02:20	11:30	13:01	18:00	18:00	22:31	04 THU	09:00	11:30	13:35	18:00		-	04760	09:00	11:10	13:35	18:00	
		- 1	15	15	Company	04 THU	09:00	11:30	13:35	18:00						13:01	18:00	18.00	22:31	05.178	02:20	11:39	13:01	18:00	13:0
			16	16 Lily	Company	05 FRI	02:20	11:30	13:01	18:00	18:00	22:31	06 FRI	02:20	11:30	13.01	00.00	10.00	-	(8 SAT					
			13000	Tom	Company	06 SAT							DE SAT			-				87 SUN					
		-	13008	Lucy	Company	g7 SUN	_						87 SUN			10.01	18:00	18:00	22:31	85 V 516	02:20	11:30	15:01	18:00	3:
			13009	Linda	Company	2		11:30	13:01	18:00	18:00	2 22:31	SO MICH	02:20	11:30	13:01	18:00	10.00		33,71,60	09:00	11:10	11:35	18:00	-
		-	13010	Luke	Company	08 MON	02:20	-	13:35	18:00			09 TUE	09:00	11:30	13:35	18:00	18.02	22:31	10 YEAR	00:20	11:30	13:01	18:00	13:3
_			13013	3	Company	09 TUE	09:00	11:30	-	18:00	18:00	2 22:31	10 WED	02:20	11:30	13:01	18:00	10.00		11 760	09.00	11:30	12:35	18:X	13:
			13014	7	Company	10 WED	02:20	11:30	13:01	-	1000		11 THU	09:00	11:30	13:35	18:00	18:02	22:31	12 FRE	00:00	11:10	13:01	R:X	13.
		- 1	13022	8	Company	11 THU	09:00	11:30	13:35	18:00	18:00	2 22:31	12 FR1	02:20	11:30	13:01	55:30	10.14							
		- 1	13025	-		12 FRI	02:20	11:30	13:01	18:00	10.64	20.00													
101	И	Ca	in	us	se t	Ξx	CE	el;	y	OL	11	са	n												
					lle					1			2												
/\	10	IN	uo	)ev	nei	Λt	. /\	10	in	ИÇ	Je	Υ!													



## Specifications

Display	2.8-inch TFT LCD Color Screen
Fingerprint Capacity	1000
Card Capacity	1000(Optional) ID or Mifare card
Transaction Capacity	80,000
Sensor	BioID Sensor/ SilkID Sensor (optional)
Algorithm Version	VX10.0
Communication	TCP/IP, USB-host
Access Control Interface	3rd Party Electric Lock, Exit Button
Standard Functions	Work Code, SMS, DST, Self-Service Query, Access Control, Automatic Status Switch, Scheduled-Bell, T9 Input, Built-In Battery
Power Supply	12V DC, 1.5A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
Dimension	184x136x37.6mm
Software	BIOXCESS Time Attendance & Access Control System

### Configuration

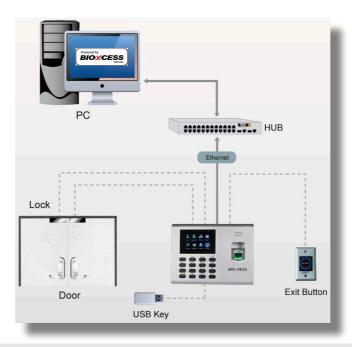







Malaysia Sole Distributor